Go Further

2016 | F-350 XL

Colors

Exterior:Green Gem

Interior:Steel

Pricing

Base MSRP [S1]	$36,080
Total of Options [S4]	$2,315
Destination Charges	$1,195
Subtotal	$39,590
Available Incentives [S3]	$0
Net Price [S5]	$39,590
Monthly Payment [S6]	$589

Based on $3,959 down payment, 72 month term and 5.9% APR

Your Selections

Model

· 2016 Ford F-350 XL Regular Cab, 4x4, SRW, 8' Box, 6.2L 2 Valve Gas SOHC EFI NA V8 (Flex-Fuel) Engine, TorqShift® 6-Speed Auto, O/D w/Tow/Haul Mode, 3.73 Non-Limited Slip Axle Ratio	$36,080

Packages

· 10,000 GVWR Package	$0
· Power Equipment Group	$895
· Snow Plow Prep Package	$85

Exterior

· Green Gem	$0
· Center High Mount Stop Lamp	$0
· Exterior Backup Alarm	$125
· Extra Heavy Duty Alternator	$0
· Tough Bed (Spray-In Bedliner)	$495
· Manual Trailer Tow Mirrors with Power Heated Glass	$0
· 6" Angular Black Molded in Color Running Board	$320
· 3.73 Non-Limited Slip Axle Ratio	$0
· 17" Argent-Painted Steel Wheels (SRW)	$0
· LT245/75Rx17E BSW A/S (5) Tires	$0

Interior

· Steel	$0
· Heavy Duty Vinyl	$0

Dealer Information

Pleasantville Ford Inc
47 Pleasantville Road
Pleasantville, NY, 10570
(914) 769-1800

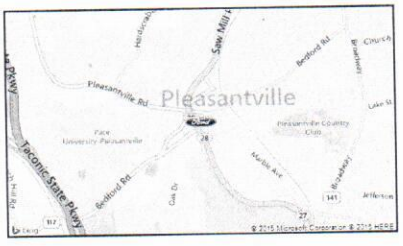

· Trailer Brake Controller	$270
· Upfitter Switches (4)	$125
· AM/FM Stereo with Digital Clock and Two Speakers	$0
· Heavy Duty Vinyl Front 40/20/40 Split Bench Seat	$0

Accessories

· None Selected

Standard Features

Interior Features

- Air Conditioning – Manual Temperature Control
- Dash-top tray
- Dome Lamp – door-activated instrument panel switch operated with delay
- Door Trim – armrest/grab handle and reflector
- Floor Covering - black vinyl
- Grab handles – driver and front passenger and roof ride handles; front passenger (also over rear doors with Crew Cab)
- Headliner – color coordinated cloth
- Instrument Cluster - multifunction message center
- Instrument panel – color coordinated
- Instrumentation with tachometer and Message Center including odometer, trip odometer, distance-to-empty, average fuel economy, engine hour meter and warning messages
- Map lights – dual (front and rear with Crew Cab)
- Powerpoint - auxiliary, 2 , instrument panel mounted
- Rearview Mirror - 11.5" day/night
- Steering Wheel - Black vinyl
- Storage – secondary glove box (4x4 requires Electronic-Shift-On-the-Fly)
- Sun visors - color coordinated vinyl, single driver with pocket, single passenger with mirror insert
- Tilt/telescoping steering wheel
- Windshield wipers – interval control
- Audio - AM/FM Stereo, Digital Clock, Two Speakers
- Seats - Front, Vinyl 40/20/40 Split Bench

Exterior Features

- Bumpers, front and rear - black painted steel with front grained molded-in-color top cover and black lower air dam
- Door Handles - black
- Grille - black bar-style
- Headlamps - Dual beam halogen
- Lights – Pickup box and cargo area
- Mirrors - Manual Telescoping Trailer Tow with Manual Glass
- Pickup box – partitionable and stackable
- Tailgate - Tailgate Assist™ and quick-release
- Tie-down hooks – pickup box (four with 6 ¾' box; six with 8' box)
- Tow hooks – (2) front, black
- Moldings - tailgate and box rail, black
- Glass – solar tinted
- Window - rear, fixed
- Window - flip-open rear quarter (SuperCab)

Power and Handling

- Alternator - Single, Heavy-Duty, 157-amp
- Axle - Twin I-beam front axle with coil spring suspension – 4x2 (F-250, F-350)
- Axle - Mono-beam front axle with coil spring suspension – 4x4 (F-250, F-350)
- Brakes – 4-wheel power disc brakes with Anti-lock Brake System (ABS); vacuum-boost (SRW)
- AdvanceTrac® with Roll Stability Control® (RSC) – SRW
- Trailer Sway Control
- 26 Gallon Fuel Tank (Diesel Engine) – 137" Wheelbase
- 26 Gallon Fuel Tank (Diesel Engine) – 142" & 156" Wheelbase
- 35 Gallon Fuel Tank (Gas Engine)

- Seats - Front, Manual Lumbar Support, Driver Side
- Seats - Rear, Vinyl 60/40 Fold-Up Bench Seat (SuperCab)
- Seats - Rear, 60/40 Flip-Up/Fold-Down Bench Seat (Crew Cab)
- Shock absorbers – heavy-duty gas
- Stabilizer bar – front
- Stationary Elevated Idle Control (SEIC)
- Steering – power
- Steering damper
- Tire Pressure Monitoring System (SRW only; excludes spare)
- Trailer Hitch Receiver – 12.5K Built Ford Tough® Trailer Hitch Receiver (SRW)
- Trailer Tow Package (F-250/F-350)
- Transfer Case - Manual 4-Wheel-Drive System with manual locking hubs (4x4 models only)
- Engine - 6.2L SOHC 2-valve Flex Fuel V8 engine (F-250/350)
- Transmission - TorqShift® Heavy-Duty 6-speed SelectShift™ Automatic
- Wheels - 17" Argent-Painted Steel (SRW)
- Wheels - 17" Argent-Painted Steel (DRW)
- LT245/75Rx17E BSW A/S (5-SRW / 7-DRW) (XLT, Lariat, King Ranch® and Platinum require DRW)
- Tire - Spare, wheel, lock and frame-mounted carrier

Safety

- Airbags – front seat front with passenger side deactivation switch (Regular Cab and SuperCab only)
- Airbags – front seat side
- Airbags – Safety Canopy® System with roll-fold side-curtain airbags
- Belt-Minder®, chime and flashing warning light on instrument cluster if belts not buckled
- Child tethers (Regular Cab, front passenger and all rear seating positions)
- Seat Belts - color coordinated with height adjustment (front outboard seating positions only)
- SOS Post Crash Alert System
- SecuriLock® Anti-Theft Ignition
- MyKey®

SUPER DUTY Specifications

Highlights Exterior Interior Capacities Engine Chassis Towing Payload Package Selector View All

Vehicle Highlights

Fuel Capacity	35 gallons (6.2L V8 gas engine) 26 gallons (6.7L Power Stroke™ Turbo Diesel on 137", 142" and 156" wheelbases) 37.5 gallons (6.7L Power Stroke™ Turbo Diesel on 158" and 172" wheelbases)
Drive Type	4x2 4x4
Available Engines	6.2L V8 Gas (FFV) 6.7L Power Stroke® V8 Turbo Diesel
Horsepower	385 @ 5500 rpm (6.2L V8 gas engine) 440 @ 2800 rpm (6.7L Power Stroke™ Turbo Diesel)
Torque	405 @ 4500 rpm (6.2L V8 gas engine) 860 @ 1600 rpm (6.7L Power Stroke™ Turbo Diesel)
Transmission	TorqShift® 6-speed SelectShift Automatic™
Wheelbase	137.0" (Regular Cab) 141.8" (SWB SuperCab); 158.0" (LWB SuperCab) 156.2" (SWB Crew Cab); 172.4" (LWB Crew Cab)
Maximum Conventional Towing	19,000 lbs. (F-350 Crew Cab DRW 4x2 and 4x4/F-450 DRW 4x4 with 6.7L Power Stroke™ Turbo Diesel)
Maximum Payload	7,050 lbs. (F-350 DRW 4x2 Regular Cab)
Maximum GVWR	14,000 lbs.
Warranty	Bumper to Bumper: 3 years / 36,000 miles Powertrain: 5 years/60,000 miles; Diesel: 5 years/100,000 miles Safety Restraint System: 5 years / 60,000 miles Corrosion (Perforation only): 5 years / Unlimited miles Roadside Assistance Program: 5 years / 60,000 miles

Back to Top

View Additional Disclosures

Share your thoughts about Ford.com [+]

SUPER DUTY Specifications

Highlights | **Exterior** | Interior | Capacities | Engine | Chassis | Towing | Payload Package Selector | View All

Exterior Dimensions

	Regular Cab	Super Cab		Crew Cab	
		SWB	LWB	SWB	LWB
	4x2/4x4	4X2/4X4	4X2/4X4	4X2/4X4	4X2/4X4
Wheelbase	137.0"	141.8"	158.0"	156.2"	172.4"
Length - overall	227.6"	232.4"	248.6"	246.8"	263.0"
Length - front bumper to back of cab	118.9"	139.8"	139.8"	154.2"	154.2"
Height - F-250 SRW (w/o options)	76.6"/79.2"	77.0"/79.5"	76.9"/79.3"	77.4"/79.7"	77.3"/79.8"
Height - F-350 SRW (w/o options)	76.5"/80.0"	76.9"/80.4"	76.7"/80.2"	77.2"/80.8"	77.2"/80.8"
Height - F-350 DRW (w/o options)	76.7"/79.5"	-	76.9"/79.7"	-	77.3"/79.9"
Height - F-450 DRW (w/o options)	-	-	-	-	79.7"
Width - SRW without mirrors	79.9"	79.9"	79.9"	79.9"	79.9"
Width - with standard mirrors	104.9"	104.9"	104.9"	104.9"	104.9"
Track - front - F-250 SRW	68.3"	68.3"	68.3"	68.3"	68.3"
Track - front - F-350 SRW	68.3"	68.3"	68.3"	68.3"	68.3"
Track - front - F-350 DRW	68.3"	-	68.3"	-	68.3"
Track - front - F-450 DRW	-	-	-	-	74.8"
Track - rear - F-250 SRW	67.2"	67.2"	67.2"	67.2"	67.2"
Track - rear - F-350 SRW	67.2"	67.2"	67.2"	67.2"	67.2"
Track - rear - F-350 DRW	74.7"	-	74.7"	-	74.7"
Track - rear - F-450 DRW	-	-	-	-	75.9"
Minimum running ground clearance - F-250 SRW	8.5"/8.2"	8.5"/8.2"	8.5"/8.1"	8.5"/8.1"	8.5"/8.1"
Minimum running ground clearance - F-350 SRW	8.5"/8.2"	8.5"/8.2"	8.5"/8.2"	8.5"/8.2"	8.5"/8.2"
Minimum running ground clearance - F-350 DRW	8.1"/8.0"	-	8.1"/8.0"	-	8.0"/8.0"
Minimum running ground clearance - F-450 DRW	-	-	-	-	8.0"
Overhang - front	38.1"	38.1"	38.1"	38.1"	38.1"
Overhang - rear	52.4"	52.4"	52.4"	52.4"	52.4"
Angle of departure - F-250 SRW	17.8°/19.2°	17.4°/18.5°	17.0°/18.3°	16.7°/18.0°	16.7°/17.9°
Angle of departure - F-350 SRW	17.3°/21.5°	17.0°/20.9°	16.6°/21.1°	16.4°/20.8°	16.3°/20.8°
Angle of departure - F-350 DRW	17.6°/19.3°	-	16.9°/18.7°	-	16.7°/18.5°
Angle of departure - F-450 DRW	-	-	-	-	18.3°
Ramp breakover angle - F-250 SRW	17.5°/20.4°	16.9°/19.8°	15.8°/18.1°	15.7°/18.1°	15.0°/17.3°
Ramp breakover angle - F-350 SRW	17.2°/21.5°	16.7°/20.9°	15.6°/19.2°	15.5°/19.2°	14.8°/18.2°
Ramp breakover angle - F-350 DRW	17.5°/20.4°	-	15.9°/18.6°	-	15.0°/17.4°

Ramp breakover angle - F-450 DRW		-	-	-	-	17.0°
Angle of approach - F-250 SRW		18.0°/19.4°	18.1°/20.1°	18.7°/20.0°	18.7°/20.0°	18.9°/20.6°
Angle of approach - F-350 SRW		18.1°/18.8°	18.2°/19.5°	18.6°/19.3°	18.6°/19.3°	19.0°/20.0°
Angle of approach - F-350 DRW		18.2°/19.2°	-	19.0°/20.6°	-	19.1°/20.3°
Angle of approach - F-450 DRW		-	-	-	-	19.8°
Open tailgate to Ground - F-250 SRW		35.2"/36.3"	34.8"/35.6"	34.4"/35.4"	34.2"/35.1"	34.1"/35.0"
Open tailgate to Ground - F-350 SRW		34.7"/38.5"	34.4"/37.9"	34.1"/38.0"	33.9"/37.8"	33.8"/37.7"
Open tailgate to Ground - F-350 DRW		35.0"/36.4"	-	34.3"/35.7"	-	34.1"/35.6"
Open tailgate to Ground - F-450 DRW		-	-	-	-	35.4"
Base Curb Weight - F-250 SRW	6.2L	5941/6351 lbs.	6230/6629 lbs.	6328/6731 lbs.	6442/6828 lbs.	6547/6942 lbs.
Base Curb Weight - F-250 SRW	6.7L	6589/7001 lbs.	6907/7254 lbs.	7070/7461 lbs.	7106/7462 lbs.	7279/7668 lbs.
Base Curb Weight - F-350 SRW (17" Wheels)	6.2L	6010/6423 lbs.	6298/6686 lbs.	6367/6769 lbs.	6481/6866 lbs.	6615/6979 lbs.
Base Curb Weight - F-350 SRW (17" Wheels)	6.7L	6656/7076 lbs.	6973/7330 lbs.	7106/7508 lbs.	7143/7528 lbs.	7316/7720 lbs.
Base Curb Weight - F-350 SRW (18" Wheels A/S)	6.2L	6066/6483 lbs.	6354/6741 lbs.	6423/6824 lbs.	6536/6922 lbs.	6670/7035 lbs.
Base Curb Weight - F-350 SRW (18" Wheels A/S)	6.7L	6711/7131 lbs.	7029/7385 lbs.	7162/7563 lbs.	7198/7584 lbs.	7371/7776 lbs.
Base Curb Weight - F-350 SRW (18" Wheels A/T)	6.2L	-/6517 lbs.	-/6775 lbs.	-/6858 lbs.	-/6955 lbs.	-/7068 lbs.
Base Curb Weight - F-350 SRW (20" Wheels)	6.7L	-/7165 lbs.	-/7417 lbs.	-/7594 lbs.	-/7620 lbs.	-/7809 lbs.
Base Curb Weight - F-350 DRW	6.2L	6433/6850 lbs.	-	6831/7242 lbs.	-	7057/7460 lbs.
Base Curb Weight - F-350 DRW	6.7L	7080/7500 lbs.	-	7579/7982 lbs.	-	7799/8200 lbs.
Base Curb Weight - F-350 DRW (PU Box Delete)	6.7L	6487/6907 lbs.	-	6986/7389 lbs.	-	7206/7607 lbs.
Base Curb Weight- F-450 DRW	6.2L	-	-	-	-	-
Base Curb Weight- F-450 DRW	6.7L	-	-	-	-	-/8611 lbs.

Back to Top

View Additional Disclosures

Share your thoughts about Ford.com

SUPER DUTY Specifications

Highlights | Exterior | Interior | Capacities | Engine | Chassis | Towing | Payload Package Selector | View All

Interior Dimensions

	Regular Cab 4X2/4X4	Super Cab 4X2/4X4	Crew Cab 4X2/4X4
Front			
Head room	40.7"	40.7"	40.7"
Shoulder room	68.0"	68.0"	68.0"
Hip room	67.6"	67.6"	67.6"
Max leg room	43.3"	43.3"	43.3"
Rear			
Head room	-	38.1"	40.8"
Shoulder room	-	68.1"	68.0"
Hip room	-	67.3"	67.6"
Leg room	-	31.6"	42.1"
Volumes (cu. ft.)			
Passenger - total	65.9	113.3	133.5
Passenger - second row	-	47.4	67.6
Cargo - behind first row	-	39.5	58.6

Back to Top

Cargo Box Dimensions

	Regular Cab	Super Cab		Crew Cab	
		SWB	LWB	SWB	LWB
	4X2/4X4	4X2/4X4	4X2/4X4	4X2/4X4	4X2/4X4
Volume (cu. ft.)	77.3	64.1	77.3	64.1	77.3
Length at floor	98.0"	81.8"	98.0"	81.8"	98.0"
Height	20.0"	20.0"	20.0"	20.0"	20.0"
Width at floor (maximum)	69.3"	69.3"	69.3"	69.3"	69.3"
Width between wheelhouse	50.9"	50.9"	50.9"	50.9"	50.9"

SWB = short wheelbase (6 3/4' cargo box).

LWB = long wheelbase (8' cargo box).

Back to Top

View Additional Disclosures

Share your thoughts about Ford.com [+]

SUPER DUTY Specifications

Highlights Exterior Interior **Capacities** Engine Chassis Towing Payload Package Selector View All

Capacities: Passengers and Fuel

	Regular Cab	Super Cab	Crew Cab
Seating capacity	3	6	6
Fuel capacity	6.2L Gas V8 35 gallon	6.7L Power Stroke™ Turbo Diesel V8 on 137", 142" and 156" wheelbases 26 gallon	6.7L Power Stroke™ Turbo Diesel V8 on 158" and 172" wheelbases 37.5 gallon

Back to Top

View Additional Disclosures

Share your thoughts about Ford.com [+]

SUPER DUTY Specifications

Highlights | Exterior | Interior | Capacities | **Engine** | Chassis | Towing | Payload Package Selector | View All

Engine Specifications

Engine Specifications		
Configuration	6.2L 2-VALVE V8 GAS (FFV) (1)	6.7L POWER STROKE™ V8 TURBO DIESEL
Fuel injection	SOHC	OHV (32-valve)
Engine control system	Sequential Electronic	High-Pressure Common-Rail
Induction system	Electronic	Electronic
Battery	Specially tuned	Single-Sequential Turbocharger; charged air cooler
Alternator	12-volt; 650-CCA/72-amp-hr	Dual 12-volt; 750-cca/78-amp-hr
	157-amp	157-amp, standard;
	Single 200-amp, optional	Single 200-amp, optional
		Dual combined 357-amp, optional
Cooling system	Pressurized series flow	Pressurized series flow
Oil-life monitor	Oil-minder system	Intelligent Oil-Life Monitor™
Cylinders	8	8
Cylinder head	Aluminum	Aluminum
Block material	Cast iron	Compacted graphite iron
Valve operation	Roller rocker shaft	Push rod/rocker arms
Camshaft drive	Silent chain	Gear
Bore	4.02"	3.90"
Stroke	3.74"	4.25"
Compression ratio	9.8:1	16.2:1
Horsepower/rpm	385 @ 5500 (2) / 316 @ 4179 (3)	440 @ 2800
Torque lb.-ft./rpm	405 @ 4500 (2) / 397 @ 4179 (3)	860 @ 1600
Recommended fuel	Regular unleaded or E85	Ultra-Low-Sulfur Diesel or B-20

(1) Certified to SAE J1349. (2) Under 10K GVWR. (3) Over 10K GVWR.

Back to Top

Transmission Specifications

Transmission Type	6-speed SelectShift Automatic™	
Case material	Aluminum	
Power Takeoff	Live-drive access on driver side (optional on diesel only)	
Gear ratios	1st	3.97:1
	2nd	2.31:1
	3rd	1.51:1
	4th	1.14:1
	5th	0.85:1
	6th	0.67:1
	Reverse	3.12:1

Back to Top

View Additional Disclosures

Share your thoughts about Ford.com

SUPER DUTY Specifications

Chassis Specifications

FRONT SUSPENSION	
Type	Independent twin I-Beam (narrow front track) with coil springs, shock absorbers, stabilizer bar (F-250/F-350 4x2) Mono beam (narrow front track) with coil springs, shock absorbers, stabilizer bar (F-250/F-350 4x4) Mono beam (wide front track) with coil springs, shock absorbers, stabilizer bar (F-450)
Max. Front GAWR	5250 lbs. (F-250/F-350 4x2) 5600 lbs. (F-250/F-350 SRW 4x4) 5940 lbs. (F-350/F-450 DRW 4x4)
Springs	Coil
Shock absorbers	Heavy-duty gas
Stabilizer bar	Standard
REAR SUSPENSION	
Type	Solid axle
Max. Rear GAWR	6290 lbs. (F-250); 7180 lbs. (F-350 SRW); 9650 lbs. (F-350 DRW); 9100 lbs. (F-450)
Springs	Leaf
Shock absorbers	Heavy-duty gas
Stabilizer bar	Standard on DRW pickup; optional in select packages on SRW pickup
STEERING	
Assist	Power
Overall ratio	20.49:1 (F-250/F-350 4x2); 20.41:1 (F-250/F-350 4x4); 20.41:1 average (F-450)
BRAKES	
Type	4-wheel vented-disc ABS (standard)
Front (rotor diameter)	14.29" (363 mm)
Rear (rotor diameter)	14.29" (363 mm)
WHEELS	
Type	Steel or aluminum
Size	17," 18" or 20" (F-250/F-350); 17" DRW (F-350) 19.5" DRW (F-450)
Number of studs	8
Bolt-circle diameter	6.7" (170 mm) SRW 7.87" (200 mm) F-350 DRW 8.86" (225 mm) F-450 DRW

Back to Top

View Additional Disclosures

Share your thoughts about Ford.com

SUPER DUTY Specifications

Conventional Towing - Maximum Loaded Trailer Weight Ratings (lbs.)

				Regular Cab				Super Cab				Crew Cab				
Engine with Automatic Transmission	Rear Axle	Axle Ratio	GCWR (lbs.)	F-250 4x2	F-250 4x4	F-350 4x2	F-350 4x4	F-250 4x2	F-250 4x4	F-350 4x2	F-350 4x4	F-250 4x2	F-250 4x4	F-350 4x2	F-350 4x4	F-450 4x4
6.2 L Gas V8	SRW	3.73	19200	12500	12500	12500	12500	12500	12400	12500	12300	12500	12200	12500	12100	-
	SRW	4.30	22200	12500	12500	12500	12500	12500	12500	12500	12500	12500	12500	12500	12500	-
	DRW	3.73	19800	-	-	13200	12700	-	-	12800	12400	-	-	12500	12100	-
	DRW	4.30	22800	-	-	16100	15700	-	-	15700	15300	-	-	15500	15100	-
6.7L Power Stroke Turbo Diesel V8	SRW	3.31	23500	12500	12500	12500	12500	14000	14000	14000	14000	14000	14000	14000	14000	-
	SRW	3.55	23500	12500	12500	12500	12500	14000	14000	14000	14000	14000	14000	14000	14000	-
	DRW	3.73	32100	-	-	19000	19000	-	-	19000	19000	-	-	19000	19000	-
	DRW	4.30	35000	-	-	-	-	-	-	-	-	-	-	-	19000	-
	DRW	4.30	40400	-	-	-	-	-	-	-	-	-	-	-	-	19000

5th Wheel Gooseneck Towing - Maximum Loaded Trailer Weight Ratings (lbs.)

				Regular Cab				Super Cab				Crew Cab				
Engine with Automatic Transmission	Rear Axle	Axle Ratio	GCWR (lbs.)	F-250 4x2	F-250 4x4	F-350 4x2	F-350 4x4	F-250 4x2	F-250 4x4	F-350 4x2	F-350 4x4	F-250 4x2	F-250 4x4	F-350 4x2	F-350 4x4	F-450 4x4
6.2 L Gas V8	SRW	3.73	19200	12900	12500	12900	12500	12700	12300	12600	12200	12400	12100	12400	12000	-
	SRW	4.30	22200	15900	15500	15900	15500	15700	15300	15600	15200	15400	15100	15400	15000	-
	DRW	3.73	19800	-	-	13100	12600	-	-	12700	12200	-	-	12400	12000	-
	DRW	4.30	22800	-	-	16100	15600	-	-	15700	15200	-	-	15400	15000	-
6.7L Power Stroke Turbo Diesel V8	SRW	3.31	23500	16600	16200	16500	16100	16300	15900	16200	15900	16100	15100	16000	15700	-
	SRW	3.55	23500	16600	16200	16500	16100	16300	15900	16200	15900	16100	15100	16000	15700	-
	DRW	3.73	32100	-	-	24700	24300	-	-	24200	23800	-	-	24000	23500	-
	DRW	4.30	35000	-	-	-	-	-	-	-	-	-	-	-	26500	-
	DRW	4.30	40400	-	-	-	-	-	-	-	-	-	-	-	-	31200

Back to Top

View Additional Disclosures

Share your thoughts about Ford.com

SUPER DUTY Specifications

Highlights | Exterior | Interior | Capacities | Engine | Chassis | Towing | **Payload Package Selector** | View All

Maximum Payload Package Selector (lbs.)

		Regular Cab	Super Cab		Crew Cab	
	GVWR (lbs)	137.0" WB	141.8" WB	158.0" WB	156.2" WB	172.4" WB
F-250 SRW 4x2	9900	3890	3600	3500	3390	3280
	10000	4040	3700	3600	3490	3380
F-250 SRW 4x4	9900	3480	3200	3100	3000	2880
	10000	3580	3300	3200	3100	2980
F-350 SRW 4x2	10000	3920	3630	3560	3450	3310
	10200	-	-	3760	3650	
	10500	4370	4080	-	-	3810
	10700	-	3650	-	4090	-
	10800	-	-	3620	3580	-
	10900	-	-	4410	-	-
	11000	4220	3900	-	-	4260
	11100	-	-	-	-	3710
	11400	-	-	4160	4120	3960
	11500	-	-	4260	-	4050
F-350 SRW 4x4	10000	3510	3240	3160	3060	2950
	10400	3910	-	-	-	-
	10500	3950	3740	-	-	-
	10600	-	3790	-	3660	-
	10700	-	-	3860	-	-
	10800	3650	-	3900	3800	3750
	11000	3790	-	4070	-	3890
	11100	4510	4250	-	-	-
	11200	-	3740	3610	3590	4060
	11300	4760	-	3660	4270	3440
	11400	4160	3910	3730	3700	3510
	11500	4260	4000	3820	3800	3610
F-350 DRW 4x2	13000	6440	-	5940	-	5720
	13500	7050	-	-	-	-
	13900	-	-	7000	-	-
	14000	6840	-	6340	-	6870
F-350 DRW 4x4	13000	6020	-	5530	-	5310
	13800	6880	-	-	-	-
	14000	6420	-	6680	-	6460
F-450 DRW 4x4	14000	-	-	-	-	5300
Max	-	7050	4270	7000	4120	6870

Back to Top

View Additional Disclosures

Share your thoughts about Ford.com