

3/4 TON CARGO VAN SPECIFICATION

General	Cargo Van, 3/4 ton, Standard Wheel Base
Year	2016
Make/Model	Any Cargo Van that meets spec
Power plant	V8 Gas
Fuel	Flex Fuel Vehicle (Gasoline/E85)
Charging System	Heavy Duty Battery with 145 amp alternator
Transmission	Automatic
Differential	Heavy Duty locking Differential
Tires	All terrain
Wheels	Steel
GVWR	8600 lbs. minimum
Cab Interior	Front Bucket Vinyl Seats Standard Audio package Cruise Control Air conditioning Tilt Steering Electric Brake controller Fixed full-body window package Glass, tinted glass all glass except for windshield & driver/passenger-side glass All Manufacturers Standard Offerings
Body exterior	Rear step bumper Color - School bus yellow or MFG equal Rear Double Doors with Windows Side Double Doors with Windows
Misc	2 Extra keys Trailer tow package including receiver hitch All Manufacturers standard offerings
DOT Option package.	See Attached
Options	% off MFG. list

Passenger and Cargo Vans:


When a DOT Optional Package is specified, it shall meet the following requirements:

1. Manufacturer's standard Chrome Yellow or School Bus Yellow.
2. LED Amber Flashing Beacons With Approved Patterns by NYSDOT:
 - a. Federal Signal 252650-02-NYSDOT Led Ultrastar Beacon.
 - b. Star Warning Systems flashing Beacon part # 255HTCL-A-NY.
 - c. Whelen flashing part #L21-NYS.
 - d. Beacon Shall be controlled by a fused/breaker, pilot lighted and labeled (no Dymo tape) switch mounted in the dash.
 - e. Two Beacons shall be mounted on the top of the roof at a nominal distance Equal to 60" inches, Center to Center, of the light, with-in the confines of the vehicle length.

3. Striping on the Rear of Van

- a. **Rear striping;** provide forty-five (45°) stripes as 3M™ reflective tape, Dark Blue 973-75 (preferred) or 580-75 or 680-75 Scotchlite™ reflective series by 3M™ (or equal providing a dark blue reflectivity). It shall be provided in width; Six (6) inch wide, Eighteen (18) inch on center. (intervals center to center when measured perpendicular to the stripe). This striping shall slope downward to street-side (driver's side of vehicle) of the vehicle at a forty-five degree (45°) angle from horizontal. This spacing location (relative to overall surface being striped) shall provide the maximum number of full width blue stripes across the rear of vehicle. (Diagram provided upon request)

REAR VIEW

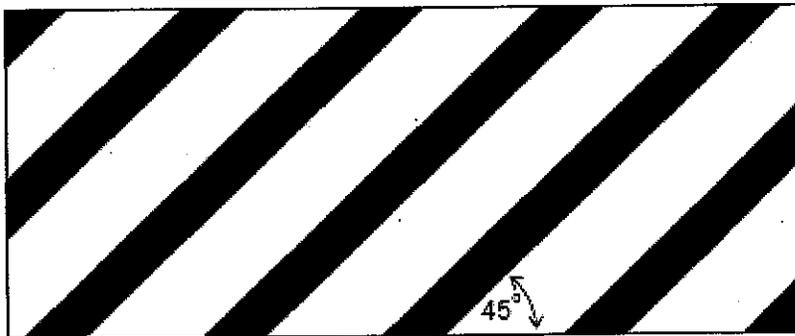

5. Fire Extinguisher - 2.5 pound dry chemical ABC rated with mounting bracket.
6. Three-piece Triangle "Flare" kit with storage box for roadside emergency use.

Delivery Location information	Number of units	
REGION 4 FLEET ADMINISTRATION 2797 CLOVER ST PITTSFORD, NY 14534-1051 CONTACT: ERIC VANOOPYEN (585 586 1252)	1	
REGION 5 FLEET ADMINISTRATION 4717 SOUTHWESTERN BLVD HAMBURG, NY 14075-1999 CONTACT: ROBERT HALL (716 649 5568)	1	
REGION 8 FLEET ADMINISTRATION 272 VIOLET AVE POUGHKEEPSIE, NY 12601-1236 CONTACT: KEVIN CHAPMAN (845 471 5488)	1	
Total units	3	