

3/4 Ton Regular Cab with Reading Classic II Body

General	3/4 ton, 2WD,Regular Cab, CA:56 inches,flex fuel
Year	2016
Make/Model	Any Make/Model that Meets Specification
Power plant	V8 Gas
Fuel	Flex Fuel Vehicle (Gasoline/E85)
Charging System	Heavy Duty Battery with 145 amp alternator
Transmission	Automatic
Differential	Heavy Duty Locking Differential
Tires	All terrain
Wheels	Steel
Cab Interior	40/20/40 split seat Standard Audio package Cruise Control Air conditioning Tilt steering Electric Brake controller
Body exterior	Rear step bumper Color - School bus yellow or MFG equal Reading Classic II Body (PA60-98SW) Reading Classic II Body Steel Upper and Lower Structures Reading Classic II Body Right Hand side mounted ladder rack Reading Classic II Steel Body with window guards front and back LED Lighting on Rear of Reading Classic Body 2-LED Dome Lamps in Enclosed Service Body
Misc	2 Extra keys/FOBs All Manufactures standard offerings Trailer tow package including receiver hitch mounted below bumper on frame 8600 Pound Rear Timbren Load Boosters
DOT Option package.	See Attached
Options	% off MFG. list

DOT Option Package LED 2016

Pick-up/Utility Trucks:

When a DOT Option Package is specified, it shall meet the following requirements:

1. Manufacturer's standard Chrome Yellow or School Bus Yellow.
2. LED Amber Flashing Beacons With Approved Patterns by NYSDOT:
 - a. Federal Signal 252650-02-NYSDOT Led Ultrastar Beacon.
 - b. Star Warning Systems flashing Beacon part # 255HTCL-A-NY.
 - c. Whelen flashing part #L21-NYS.


Beacon Shall be controlled by a fused/breaker, pilot lighted and labeled (no Dymo tape) switch mounted in the dash.

- d. Two Beacons shall be mounted on the top of the utility enclosure at a nominal distance Equal to 56" inches, Center to Center, of the light, with-in the confines of the vehicle width and 18 inches back from the front of the enclosure.

3. Striping on the Rear Utility Body –

a. Rear striping; provide forty-five (45°) stripes as 3M™ reflective tape, Dark Blue 973-75(preferred) or 580-75 or 680-75 Scotchlite™ reflective series by 3M™ (or equal providing a dark blue reflectivity). It shall be provided in width; Six (6) inch wide, Eighteen (18) inch on center. (intervals center to center when measured perpendicular to the stripe). This striping shall slope downward to street-side (driver's side of vehicle) of the vehicle at a forty-five degree (45°) angle from horizontal. This spacing location (relative to overall surface being striped) shall provide the maximum number of full width blue stripes across the rear of vehicle. (Diagram provided upon request)

REAR VIEW

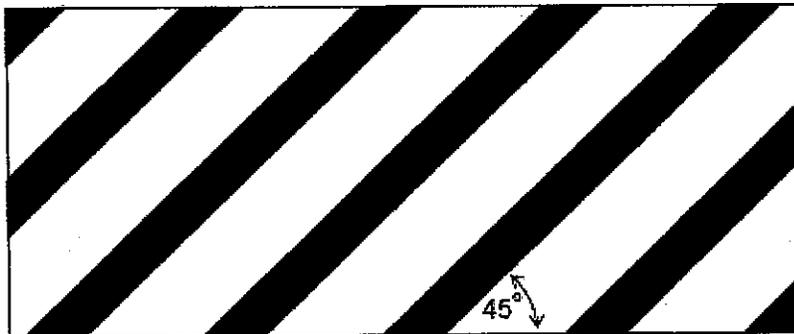

5. Fire Extinguisher - 2.5 pound dry chemical ABC rated with mounting bracket.
6. Three-piece Triangle "Flare" kit with storage box for roadside emergency use.