


**INTERNATIONAL<sup>®</sup>**

July 08, 2016

**Prepared For:**  
NYS Parks Recs and Historic Preservation  
John DeBell  
14 Maintenance Ln.  
Pleasant Valley, NY 12569-5165  
(845)452 - 3724  
Reference ID: NYS DOT-50K BID

**Presented By:**  
NAVISTAR, INC  
Josh Lepage  
399 ALBANY SHAKER RD  
STE 202  
Loudonville NY 12211 -  
(518)694-3370

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

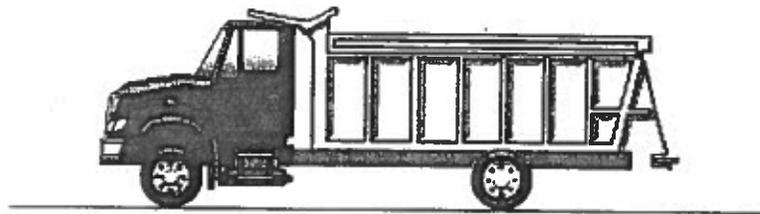

**Model Profile**  
**2017 7600 SFA 4X2 2010 (SA567)**

<b>APPLICATION:</b>	Front Plow No Spreader
<b>MISSION:</b>	Requested GVWR: 50000, Calc. GVWR: 47120 Calc. Start / Grade Ability: 42.00% / 2.94% @ 55 MPH Calc. Geared Speed: 82.3 MPH
<b>DIMENSION:</b>	Wheelbase: 191.00, CA: 107.50, Axle to Frame: 75.00
<b>ENGINE, DIESEL:</b>	{Navistar N13} EPA 2010, SCR, 390 HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 390 Peak HP (Max)
<b>TRANSMISSION, MANUAL:</b>	{Fuller RTO(F)-14908LL} 10-Speed Manual; Double Lo With Overdrive and With Air Shift
<b>CLUTCH:</b>	{Eaton Fuller Easy-Pedal Advantage} Manual Adjust, Two-Plate, Cast Angle Spring; Ceramic, 15.5" Diameter, Soft Clutch 7-Spring Damper, Mechanical Pull-Type Control, 1450 lb-ft Torque Capacity
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
<b>AXLE, REAR, SINGLE:</b>	{Meritor RS-30-185} Single Reduction, Standard Track, 30,000-lb Capacity, T Wheel Ends, Driver Controlled Locking Differential Gear Ratio: 4.30
<b>CAB:</b>	Conventional
<b>TIRE, FRONT:</b>	(2) 315/80R22.5 G289 WHA (GOODYEAR) 484 rev/mile, load range L, 20 ply
<b>TIRE, REAR:</b>	(4) 12R22.5 G282 MSD (GOODYEAR) 481 rev/mile, load range H, 16 ply
<b>SUSPENSION, RR, SPRING, SINGLE:</b>	Vari-Rate; 31,000-lb Capacity, Includes 4500-lb Capacity Multileaf Auxiliary
<b>FRAME REINFORCEMENT:</b>	Outer "C" Channel, Heat Treated Alloy Steel (120,000 PSI Yield); 10.813" x 3.892" x 0.312", (274.6mm x 98.9mm x 8.0mm); 480.0" (12192mm) Maximum OAL
<b>PAINT:</b>	Cab schematic 100GR Location 1: 5B15, Medium Gray-Green Metallic (Prem) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
SA56700	Base Chassis, Model 7600 SFA 4X2 2010 with 191.00 Wheelbase, 107 50 CA, and 75.00 Axle to Frame
1570	TOW HOOK, FRONT (2) Frame Mounted
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL
1GBP	FRAME REINFORCEMENT Outer "C" Channel, Heat Treated Alloy Steel (120,000 PSI Yield); 10.813" x 3.892" x 0.312", (274.6mm x 98.9mm x 8.0mm); 480.0" (12192mm) Maximum OAL
1LLA	BUMPER, FRONT Steel, Swept Back  <u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille
1WUB	WHEELBASE RANGE 163" (415cm) Through and Including 209" (530cm)
2ARY	AXLE, FRONT NON-DRIVING (Meritor MFS-20-133A) Wide Track, I-Beam Type, 20,000-lb Capacity  <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes; Front Air Cam; Wheels; Tires.
3770	SPRINGS, FRONT AUXILIARY Rubber
3ACS	SUSPENSION, FRONT, SPRING Multileaf, Shackle Type, Single Stage Spring; 20,000-lb Capacity; Less Shock Absorbers  <u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free  <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes; Front Air Cam; Wheels; Tires.
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications  <u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release. 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4  <u>Notes</u> : Rear Axle is Limited to 23,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered.
4193	BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 Sqn Long Stroke Brake Chambers  <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes; Front Air Cam; Wheels; Tires.

<u>Code</u>	<u>Description</u>
4773	BRAKE SHOES, REAR Cast  <u>Notes</u> : Provides Rear Axle GAWR Up to 26,000-Lb.
4AZA	AIR BRAKE ABS (Bendix AntiLock Brake System) Full Vehicle Wheel Control System (4-Channel)
4EBS	AIR DRYER (Bendix AD-9) With Heater  <u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab
4EXT	BRAKE CHAMBERS, REAR AXLE (Bendix EverSure) 36/36 Spring Brake
4EXV	BRAKE CHAMBERS, FRONT AXLE (Bendix) 24 SqIn
4LAA	SLACK ADJUSTERS, FRONT (Haldex) Automatic
4LGA	SLACK ADJUSTERS, REAR (Haldex) Automatic
4NDA	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 36/36 Sq.In. Long Stroke Brake Chambers and Spring Actuated Parking Brakes  <u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
4SPM	AIR COMPRESSOR (Bendix BA-921 Head Unload) 15.9 CFM Capacity, Single Cylinder
4VGN	AIR TANK Painted Aluminum, With Straight Thread O-Ring Ports
4WBX	DUST SHIELDS, FRONT BRAKE for Air Brakes
4WDM	DUST SHIELDS, REAR BRAKE for Air Brakes
4WRP	DRAIN VALVE Automatic, with (3) Pull Chains, for Air Tanks
4WZJ	AIR TANK LOCATION (2) : One Mounted Under Each Frame Rail, Front of Rear Suspension, Parallel to Rail
5708	STEERING COLUMN Tiltting
5CAL	STEERING WHEEL 2-Spoke, 18" Dia., Black
5PTB	STEERING GEAR (2) (Sheppard M100/M80) Dual Power
7BEP	EXHAUST SYSTEM Switchback Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; Includes Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab  <u>Includes</u> : EXHAUST HEIGHT 10' Exhaust Height - Based on Empty Chassis with Standard Components (+ or - 1" Height)
7SDK	ENGINE COMPRESSION BRAKE by Jacobs; for N13 Engines, With Selector Switch and On/Off Switch
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment  <u>Includes</u> : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever

<u>Code</u>	<u>Description</u>
	<ul style="list-style-type: none"> <li>: HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels</li> <li>: JUMP START STUD Located on Positive Terminal of Outermost Battery</li> <li>: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light</li> <li>: STARTER SWITCH Electric, Key Operated</li> <li>: STOP, TURN, TAIL &amp; B/U LIGHTS Dual, Rear, Combination with Reflector</li> <li>: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature</li> <li>: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever</li> <li>: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted</li> <li>: WIRING, CHASSIS Color Coded and Continuously Numbered</li> </ul>
8541	HORN, ELECTRIC (2) Disc Style
8718	POWER SOURCE Cigar Type Receptacle without Plug and Cord
8GXJ	ALTERNATOR (Leece-Neville AVI160P2013) Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn
8MKL	BATTERY SYSTEM (International) Maintenance-Free, (3) 12-Volt 1950CCA Total
8RKB	RADIO (Panasonic CQ120) AM/FM, Includes Multiple Speakers, Includes Auxiliary Input  Includes <ul style="list-style-type: none"> <li>: SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior</li> <li>: SPEAKERS IN CAB (4) Coaxial with Premium Interior</li> </ul>
8THB	BACK-UP ALARM Electric, 102 dBA
8THJ	AUXILIARY HARNESS 3 0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8TME	TRAILER CONNECTION SOCKET 7-Way; Mounted at Rear of Frame, Wired for Turn Signals Independent of Stop, Compatible With Trailers That Have Amber or Side Turn Lamps
8TMH	SWITCH, AUXILIARY Accessory Control; for Wiring in Roof, With Maximum of 20 amp Load With Switches In Instrument Panel
8VUJ	BATTERY BOX Steel With Plastic Cover, 18" Wide, 2, 3, or 4 Battery Capacity, Mounted Right Side Back of Cab
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time
8WPH	CLEARANCE/MARKER LIGHTS (5) (Truck Lite) Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, With Ignition "OFF" and any Door Opened
8WXG	STARTING MOTOR (Mitsubishi Electric Automotive America 105P) 12-Volt, with Soft-Start

Notes

<u>Code</u>	<u>Description</u>
	: This starter is designed to work reliably without the need for thermal overcrank protection and provides the same warranty coverage as starters with thermal overcrank protection.
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
9585	FENDER EXTENSIONS Rubber
9HAN	INSULATION, UNDER HOOD for Sound Abatement
9HBM	GRILLE Stationary, Chrome
9HBN	INSULATION, SPLASH PANELS for Sound Abatement
9WBK	FRONT END Tilting, Fiberglass, With Three Piece Construction Includes Long Hood
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u>
	: PAINT SCHEMATIC ID LETTERS "GR"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10769	PAINT CLASS Premium Color
10943	KEYS - ALL ALIKE Fleet - Includes Ignition and Cab Door Keys
10UAC	VEHICLE REGISTRATION IDENTITY ID for the State of California
10WCY	SAFETY TRIANGLES
10WGN	KEYS - ALL ALIKE, ID Z-003
10WJH	PROMOTIONAL PACKAGE Government and Municipal Silver Package; Two Year Limited Subscription of On-Command Service Information (Formerly Fleet ISIS), and On-Command Parts Information (Formerly Fleet Parts Catalog), Requires Specific Feature Combinations
11MHD	CLUTCH (Eaton Fuller Easy-Pedal Advantage) Manual Adjust, Two-Plate, Cast Angle Spring, Ceramic, 15.5" Diameter, Soft Clutch 7-Spring Damper, Mechanical Pull-Type Control, 1450 lb-ft Torque Capacity
	<u>Includes</u>
	: CLUTCH RELEASE BEARING Greasable
12772	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection, for N13 Engines
12850	PTO EFFECTS, ENGINE FRONT for N13 Engines, Less PTO Unit, Includes Adapter Plate on Engine Front Mounted
12864	BLOCK HEATER, ENGINE (Phillips) 120V/1500W
	<u>Includes</u>
	: BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door
12BCP	ENGINE, DIESEL (Navistar N13) EPA 2010, SCR, 390 HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 390 Peak HP (Max)
12THT	FAN DRIVE (Horton Drivemaster) Direct Drive Type, Two Speed With Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u>
	: FAN Nylon
12UNX	FEDERAL EMISSIONS (Navistar N13) EPA, OBD and GHG Certified for Calendar Year 2016

<u>Code</u>	<u>Description</u>
12VBC	AIR CLEANER Single Element  <u>Includes</u> : AIR CLEANER with Vacuator : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted
12WEG	COLD STARTING EQUIPMENT Automatic; With Engine ECM Control
12WZJ	EMISSION COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door
12XAW	RADIATOR Aluminum; Welded, Front to Back CrossFlow System, 1593 SqIn, 1012 SqIn CAC, 1543 SqIn 3 Core LTR
13GHW	TRANSMISSION, MANUAL (Fuller RTO(F)-14908LL) 10-Speed Manual; Double Lo With Overdrive and With Air Shift  <u>Includes</u> : CLUTCH BRAKE Torque Limiting : FILL PLUG, MAGNETIC
13WAN	OIL COOLER MANUAL TRANSMISSION for International, Fuller, Meritor or Spicer Transmission, Mounted on Radiator, Air to Oil Type, (REQUIRES TRANSMISSION LUBE PUMP)
13WAP	TRANSMISSION LUBE PUMP for International, Fuller, Meritor or Spicer Transmissions; USE ONLY WHEN PUMP IS NOT INCLUDED STANDARD IN TRANSMISSION
13XAN	PTO LOCATION No PTO
14ASD	AXLE, REAR, SINGLE (Mentor RS-30-185) Single Reduction, Standard Track, 30,000-lb Capacity, T Wheel Ends, Driver Controlled Locking Differential, Gear Ratio: 4.30  <u>Includes</u> : REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle  <u>Notes</u> : Axle Lead Time is 60 Days : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance
14SAL	SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 31,000-lb Capacity, Includes 4500-lb Capacity Multileaf Auxiliary
15DYP	DEF TANK 9.5 U.S. Gal. 36 0L Capacity, Frame Mounted Outside Left Rail, Under Cab
15LKU	FUEL/WATER SEPARATOR (Racor) Fuel Pre-Filter and Filter Base, Includes Water-In-Fuel Sensor
15SJZ	FUEL TANK Top Draw; Non-Polished Aluminum, 26" Diam., 80 U.S. Gal., 302 L Capacity Mounted Left Side, Under Cab
16030	CAB Conventional  <u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side

<u>Code</u>	<u>Description</u>
	: INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (4) Two Steps Per Door
16HBA	GAUGE CLUSTER English With English Electronic Speedometer  <u>Includes</u> : GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16HLJ	GAUGE, DEF FLUID LEVEL
16JNT	SEAT, DRIVER (National 2000) Air Suspension, High Back With Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, With 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust  <u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type
16RPV	SEAT, PASSENGER (National 2000) Air Suspension, High Back With Integral Headrest, Vinyl, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Back Adjust
16SDE	MIRROR, CONVEX, LOOK DOWN (Lang Mekra) Right Side; 6" x 10 1/4"
16SDZ	MIRROR, CONVEX, HOOD MOUNTED (Lang Mekra) Right and Left Side, 7.44" Sq., Bright
16SNB	MIRRORS (2) (Lang Mekra) Rectangular, Thermostatically Controlled Heated Heads, Black Heads, Brackets and Arms, Breakaway Type, 7.55" x 14.1" Integral Convex Both Sides, 102" Inside Spacing
16VCC	SEAT BELT All Orange; 1 to 3
16WBY	ARM REST, RIGHT, DRIVER SEAT
16WBZ	ARM REST, LEFT, PASSENGER SEAT
16WCT	AIR CONDITIONER (Blend-Air) With Integral Heater & Defroster  <u>Includes</u> : HEATER HOSES Premium : HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps : REFRIGERANT Hydrofluorocarbon HFC-134A
16WHJ	HOSE CLAMPS, HEATER HOSE (Breeze) Belleville Washer Type
16WJT	INSTRUMENT PANEL Center Section, Ergonomic Panel
16WKY	HVAC FRESH AIR FILTER
16WLE	STORAGE POCKET, DOOR Molded Plastic, Full Width; Mounted on Passenger Door
16WRX	CAB INTERIOR TRIM Deluxe  <u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering

<u>Code</u>	<u>Description</u>
	<ul style="list-style-type: none"> <li>: CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side</li> <li>: CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets and CB Radio Pocket</li> <li>: DOOR TRIM PANELS Molded Plastic; Driver and Passenger Doors</li> <li>: FLOOR COVERING Rubber, Black</li> <li>: HEADLINER Soft Padded Cloth</li> <li>: INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section</li> <li>: STORAGE POCKET, DOOR (1) Molded Plastic, Full-Length; Driver Door</li> <li>: SUN VISOR (2) Padded Vinyl with Driver Side Toll Ticket Strap, Integral to Console</li> </ul>
16WSK	CAB REAR SUSPENSION Air Bag Type
16XRX	MODESTY PANEL Painted
27DPN	WHEELS, FRONT {Accuride 29039} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc
28DUL	WHEELS, REAR {Accuride 29300} DUAL DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
29PAW	PAINT IDENTITY, FRONT WHEELS Disc Front Wheels, With Vendor Applied Gray Powder Coat Paint
29PAX	PAINT IDENTITY, REAR WHEELS Disc Rear Wheels; With Vendor Applied Gray Powder Coat Paint
29WAP	WHEEL GUARDS, FRONT {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts Mounted Between Hub and Wheel
29WAR	WHEEL GUARDS, REAR {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts, Mounted Between Hub & Wheel and Between Dual Wheels
7382158105	(4) TIRE, REAR 12R22.5 G282 MSD (GOODYEAR) 481 rev/mile, load range H, 16 ply
7782548109	(2) TIRE, FRONT 315/80R22.5 G289 WHA (GOODYEAR) 484 rev/mile, load range L, 20 ply
40118	WARRANTY Standard for Paystar 5000, and Workstar 7500/7600, Effective with Vehicles Built January 2, 2015 or Later, CTS-2003Z



Cives Corporation, dba  
 Viking Cives (USA)  
 14331 Mill Street  
 Harrisville, NY 13648  
 Phone: (315) 543-2321  
 Fax: (315) 543-2366  
 www.vikingcives.com

**QUOTATION**

Quote ID: 10385

Page 1 of 3

**Customer:** NAVISTAR, INC.  
**Contact:**  
**Address:** 399 ALBANY SHAKER ROAD  
 SUITE 202  
 LOUDONVILLE NY 12211

**Phone:** 518-694-3370  
**Fax:**  
**Attn:**

**Quote Number:** 10385  
**Quote Date:** 7/5/2016  
**Quote valid until:** 11/30/2016  
**For:** NYS Parks  
**Terms:** Net 30 days  
**Salesperson:** CORY BEAROR  
**FOB:** Destination

QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
	<b>HITCH FOR FACTORY MOUNTS</b>		
1	Hitches with mtg. bolts & nuts, pins (P10)		
1	S10300F - Custom Hitch Plow Mount-Tilt-Over		
1	S11010 - 4" x 10" DA Cylinder (cannot be used with Husting Hitches)		
1	S11100 - Lift Yoke Extended Long (standard)		
1	S12200 - Chelsea PTO		
1	S13010 - Push Center, 30-1/2"		
1	S14001 - LIFT GROUP - THREE GRAB		
1	S15002F - Hose Connecting Bracket w/stainless steel fittings and disconnects (no restrictor) (std.)		
1	S15101F - Quick Disconnects for Lift Cylinder, stainless steel		
	<b>REVERSIBLE PLOW, HEAVY DUTY FULL TRIP 25 DEGREE</b>		
1	S52020 - R1042FE Moldboard		
1	S52100 - Steel Blade Option, 12" punching for 10' Moldboard		
1	S52330 - Twin Cylinder (cushion valve) Power Reverse Pushframe (PRR)		
1	S52370 - Trip Spring Arm for Straight Reversibles and OW2852FE (except 1248FE) (pair)		
1	S52410 - 30-1/2" pushlug swivel		
1	S52530 - Two Chain Lift		
1	S52600 - 25 Degree Moldboard Shoes (pair)		
1	S52640 - Screw Adjustable 12" dia. Mushroom Shoe Option Cast (pair)		
1	S52700 - Rubber Deflector Option 12" wide - for 10' Moldboard		
	<b>HYDRAULICS FOR FACTORY MOUNTS</b>		
1	S20061F - Permco P3000 Single Pump w/Chelsea PTO - hot shift (29 gpm)		
1	S22000F - 35 Gallon Frame Mount Oil Reservoir		
1	S22110 - Hydraulic Oil Line Shut Off (1-1/4" Standard) (each)		
1	S23120 - Three Spool Valve		
1	S24200F - Cab Control, One Handle Floor Mount-air operated		
1	S24231F - Cab Control, Two Handle Pedestal Mount-air operated		
1	S24280F - For units with Two Air Cab Controls		
1	S26030SF - Hose Kit - Front Mount with SS tubing under truck		
1	S70000F - Plow Lights (Truck Lite) (for use with reversible plows)		



Cives Corporation, dba  
 Viking Cives (USA)  
 14331 Mill Street  
 Harrisville, NY 13648  
 Phone: (315) 543-2321  
 Fax: (315) 543-2366  
 www.vikingcives.com

**QUOTATION**

Quote ID: 10385

Page 2 of 3

QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
1	S70121F - LED Lights Stop/Tail/Turn - back of body (pair)		
1	S70386F - LED Back Up Lights - back of body (pair)		
1	S70388F - LED Strobe Amber Flashing Lights - back of body (pair)		
1	S70117F - Strobe Light - 16" Minibar (Truck Lite) - Magnetic Roof Mount		
1	S70135F - Pintle Hook (25 ton) and Plate		
1	S70307F - Electronic Brake Controller		
1	S70360F - 7 Way Trailer Plug		
1	S89319F - Glad Hands		
2	S70402----18" x 18" x 24" Aluminum Tool Box		
	<b>GALION</b>		
1	ON10658 - GALION 430U-10' X 84" X 30" X 40" STEEL DUMP BODY Capacity: 6.4 8.6 1/4" AR450 FLOOR w/8 GA. HI-TEN SIDES, FRONT & TAILGATE Length: 120" FORMED OUTWARD "V" HORIZONTAL EACH SIDE Width: 84" GRIP STRUT BOTH SIDES  Side Height: 30" ---SMOOTH SIDE CONSTRUCTION  FRONT & REAR CORNER POST 3/8" X 1-1/2" TARP RAIL BOTH SIDES Rear Height: 40" 2-STEP SLIDE OUT LADDER  Front Height: 40" 1/2" X 84" X 10 GA. HI-TEN CAB GUARD 10" X 96" X 8 GA. EXTENSION PAN Floor: 1/4" AR450 6-PANEL D/A TAILGATE 2-1/2" X 8" D/A RELEASE Sides: 8 GA HI-TEN (1) COAL DOOR IN TAILGATE Front: 8 GA HI-TEN FED Gate: 8 GA HI-TEN U860D-DA CLASS 60 HOIST Panels: 6 BACKUP ALARM & BODYUP LIGHT Coal Doors: YES [1]  Crossmemberless Understructure		
	<b>DONOVAN TARP SYSTEM</b>		
1	GS71307F - DONOVAN Bullet Electric Tarp System - aluminum - w/30 deg. upper arms - includes direct		
1	GS71321 - DONOVAN Mesh Tarps (7 ft. wide) 16 ft. long		
	<b>FACTORY INSTALLATION</b>		



Cives Corporation, dba  
 Viking Cives (USA)  
 14331 Mill Street  
 Harrisville, NY 13648  
 Phone: (315) 543-2321  
 Fax: (315) 543-2366  
 www.vikingcives.com

**QUOTATION**

Quote ID: 10385

Page 3 of 3

QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
1	S79000F - Factory Install - Front Mount		
1	S79100F - Factory Install - Plow Lights		
1	S79117F - Factory Install - Revolving Light or Strobe Light		
1	S79150F - Factory Install - extra valve section (per each section)		
1	S79200F - Factory Install - Dump Body - Contractor Style & ELP		
1	S79310F - Factory Install - Tarp System, semi-automatic or electric		

Quote Total:	
Discount:	
Total Cost For Equipment:	
Charges	
Total Due	

CA Required = 84"

Delivery to Region 5

The following options may be added:

QUANTITY	DESCRIPTION	PRICE EACH	AMOUNT
1	STAINLESS STEEL UPGRADE 201-2B 7 gauge Stainless steel sides, ends, asphalt pan, and cab shield 304-2B 1/4" Stainless steel floor		

Customer must fill out the information below before the order can be processed...

Accepted by:	
Date:	
P.O. number:	

The price and terms on this quotation are not subject to verbal changes or other agreements unless approved in writing by the Home Office of the Seller. All quotations and agreements are contingent upon strikes, accidents, fires, availability of material and all other causes beyond our control. Prices are based on costs and conditions existing on date of quotation and are subject to change by the Seller before final acceptance.

- ◆ Typographical and stenographic errors subject to corrections. Purchaser agrees to accept either overage or shortage not in excess of ten percent to be charged pro-rata. Purchaser assumes liability for patent and copyright infringement when goods are made to Purchaser's specifications. When quotation specifies material to be furnished by the purchaser, ample allowance must be made for reasonable spoilage and material must be of suitable quality to facilitate efficient production.
- ◆ Conditions not specifically stated herein shall be governed by the established trade customs. Terms inconsistent with those stated herein which may appear on Purchaser's formal order will not be binding on the Seller.
- ◆ Unless otherwise stated, installation charges do not include modifications to exhaust systems, cab protectors or bumpers.