

2017 Hino model 258ALP W/Morgan 14ft.GVSD79 body

Truck has a max. height requirement of 10' 6"

Dock height 43"

Hino 258ALP truck

Color white

Allison Auto transmission

Air conditioning

Cloth seats

Cold weather package (block heater, etc.)

Back up alarm

Full air brakes

6 cylinder turbo diesel

Exhaust brake

Morgan GVSD79 14 ft. dry freight body

Translucent roof

Interior light

Exterior toolbox left side 18"X24" min.

Curbside door w/grab handle and step

3 rows of interior tie down rail (sides and front)

5/8" min. plywood sides

12"min. height side kick plates

24" diamond plate floor entrance

Oak flooring

Rear full length grab handles both sides (rear)

Rear steps both sides

Palfinger model ILK-33 aluminum platform size 94"X72" Cantilever lift gate 3300lb. min. lift capacity


Cart stops

Interior and exterior lift gate switches

General Info

2016 HINO 258ALP

4 x 2 CONVENTIONAL GVW: 25,500 LBS. BBC: 108" ENGINE MODEL: J08E-VC/VB (TURBO INTERCOOLED)

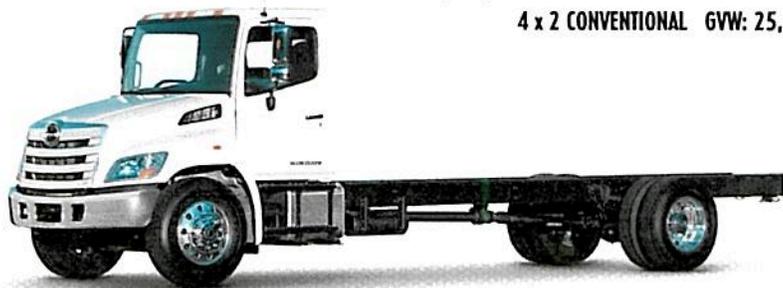

ENGINE

STD	OPT
Hino J08E-VC	Hino J08E-VB
220 HP @2500 rpm	260 HP @ 2500 rpm
520 lb.-ft. @ 1,500 rpm	660 lb.-ft. @ 1,500 rpm

Fuel System - Common Rail, Direct injection type. (Denso)

POWERTRAIN AND PERFORMANCE

GVW	25,500 lbs.		
GCWR	26,000 lbs.	26,000 lbs.	
Powertrain	STD	OPT	
Max. speed mph	75		
Startability w/ 2200 RDS (% of Grade)	14.1	16.9	17.9
Rear Axle Gear Ratios	STD / 4.11	OPT / 4.88 max 71 mph	OPT / 5.13 max 68 mph

Transmission	Model	Allison 2200 RDS	Allison 2500 RDS
		Type	Type
Ratios	1st	3.102	3.512
	2nd	1.811	1.896
	3rd	1.406	1.439
	4th	1.000	1.000
	5th	0.712	0.737
	6th	0.610	0.640
	Rev	4.492	5.086

Tires (standard) 245/70R 19.5 (G)

DIMENSIONS

Wheelbase	in.	152/G	175/J	187/L	205/M	212/N	217/P	235/R	253/T	271/V
Cab to Axle	in.	84.6	107.6	119.6	137.6	144.6	149.6	167.6	185.6	203.6
Rear overhang	in.	50.0	63.0	75.0	75.0	50.0	97.0	97.0	97.0	79.0

FRAME HEIGHT AT

Front axle	in.	33.3	33.3	33.3	33.3	33.3	33.3	33.3	33.3	33.3
Rear axle	in.	35.4	35.4	35.4	35.4	35.4	35.4	35.4	35.4	35.4

WEIGHT CAPACITIES

Front axle	lbs.	10,000
Rear axle	lbs.	17,500
Front spring	lbs.	8,000
Rear spring	lbs.	19,000

AXLE / SUSPENSION

Front axle	MFS-10 series reversed Elliot, "I" beam. (oil lubricated type)
Front spring	Taper-leaf springs shock absorbers and stabilizer.
Rear axle	RS17-145 Series, full-floating, single reduction; single-speed by hypoid gearings.
Rear spring	Semi-elliptic leaf spring.

FRAME

Ladder type	Straight C Channel	
Width	in.	34
Yield strength	PSI	80,000
Resisting bending moment (one side)	in.-lbs.	152"WB 1,280,800 All Others 1,031,900

WHEELS / TIRES

6 Wheels	19.5X6.75 10-stud disc.
Wheel style	Steel, powder coated
6 Tires	245/70R 19.5 (G)
Tire pattern	Fr - Rib Rr - All Season

BRAKES

Service brake	Full air, dual circuit, "S" cam type, leading and trailing shoes with automatic adjustment
Exhaust brake	Electric-pneumatic with valve in exhaust pipe.
Parking Brake	Spring brake chamber (rear axle) with SR-7 emergency brake system.

CHASSIS EQUIPMENT

Fuel Tank	STD - 50gal. OPT - Dual 50gal. / Single 90gal.
DEF Tank	4.7gal.
Clean CA	STD - 50 gal fuel tank mounted under cab (driver side)

ELECTRICAL EQUIPMENT

Batteries	STD - two 12V parallel circuit, 1200 CCA, 12V (GR 27 type) OPT - 2 or 3 parallel circuit (GR 31 type) OPT - 2 parallel circuit AGM (925 CCA)
Alternator	STD - 12 V, 130 A, Delco (brush type) OPT - 12V, 135 A, 180 A, 200, Delco (brushless)
Starter	Denso - 12 V, 6.4 hp
Cab audio	AM / FM / CD Player / USB / AUX. input

POPULAR OPTIONAL EQUIPMENT (partial list)

Air ride suspension - Hendrickson
Air ride suspension dump valve - (electric)
Anti-Siphon device insert in fuel tank
Back-up alarm
Bluetooth radio
Cab paint, exterior - Black or red (factory)
Cab paint, exterior - Additional options available upon request
Cold weather package
Hinocare Preventive Care Program
Engine idle shutdown
Exhaust system - Vertical stack type
INSIGHT 2.0 Telematics System
Mirrors, power heated (available in chrome)
Mirrors, fender - Chrome (both sides or passenger only)
Mirrors, outside - Chrome
Power windows, power door locks (available with keyless entry)
Wheels - polished aluminum

NOTES

All specifications of the products are with normal manufacturing allowances and tolerances. Hino Motors Sales U.S.A., Inc. reserves the right to alter specifications at any time without previous notice.