Mini-Bid Request #T16090018
NYS Parks, Recreation and Historic Preservation LI7
(1) Quad Cab/Chassis (Ford F350 or Equivalent) w/Steel Service Tapered Panel Body Reading or Equivalent

Regular Cab

4 Wheel Drive

8 Cyl Diesel Engine

Automatic Transmission

3.73 Electric Locking Axle Ratio

Trailer Tow Package

Single Rear Axle

Manual Telescoping Trailer

Color White

Additional Specs:
Vinyl Seat
Manual 4x4 Transfer Case Air Conditioning
AM/FM Radio

Steel Service Body (Reading Model A98-SWS Standard "A" Compartment Layout or Equivalent)
Color White

Master Locking Steel Slide Bar to Simultaneously Lock all Slide Compartment Doors

Spray on Bedliner
Deck Plate Step Bumper with Recess (for Towing)
Tapered Panel Body (Reading 60 Series Model 108DW or Equivalent)

serviceBODY

Rq 22308

CLASSIC II SERVICE BODIES

READING

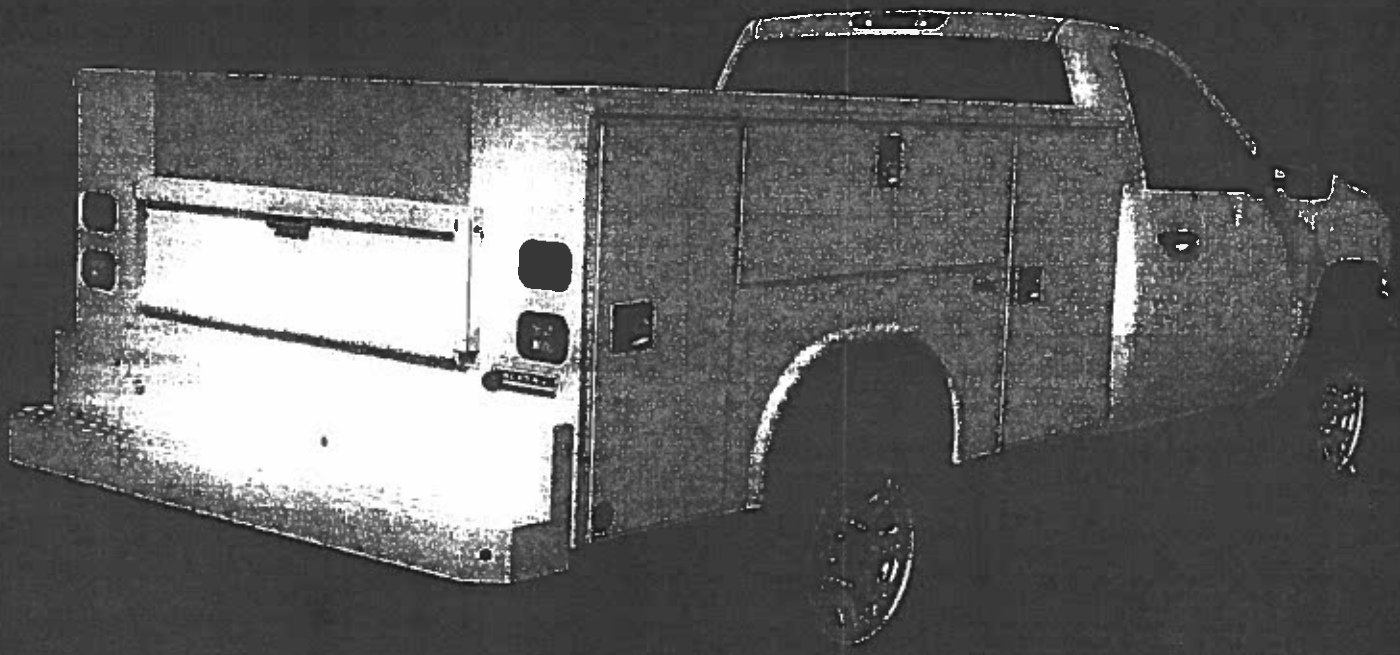

STANDARD FEATURES

Our flagship Reading service body is the product of 60 years of refinement, and it shows. Available in rugged steel or fuel-saving aluminum, our service truck bodies offer a wealth of exclusive features and options. The result is a service body that you can truly make your own—and will serve you well for many miles down the road

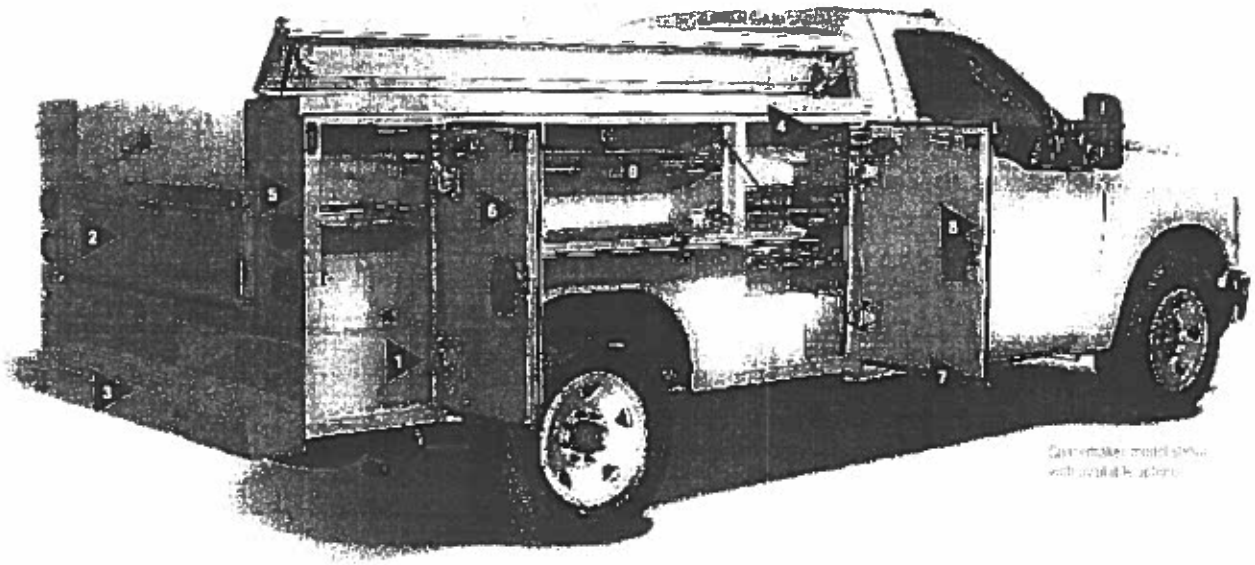

Cannemaker model shown with available options

1. **Patented Hidden Hinges** – Industry-exclusive overlapping [illegible] construction resists forcible entry. Robust, concealed hinge design provides protection against corrosion without requiring [illegible] [illegible]

2. **Skim Action Tailgate** – [illegible] double panel construction. Stainless steel locking [illegible] striker channels.

3. **Pooched, Frame-Mounted Bumper** – Prevents body damage [illegible] provides slip-resistant step surface. E-coat prime and white powder coat finish.

4. **Nitrogen Strut Door Holders** - All vertical compartment doors are equipped with nitrogen strut door holders. Internal dampeners control the opening and closing of doors.

5. **Rectangular Tail Lights** – Rubber isolated for improved leak resistance.

6. **Heavy Duty Compartment Doors** – Double-panel construction with internal reinforcement for added strength.

7. **Exclusive Dual-Pro® Seal System** – Large, automotive quality double type seal and mechanical seal provide a dual line of defense against weather. Patented design increases clear door openings in every compartment of the body.

8. **Stainless Steel Rotary Locks** – Attractive appearance with no exposed fasteners; rust resistant. Features a double-bitted, high-quality locking cylinder; adjustable striker pins; and an O-ring seal to prevent water intrusion.

9. **Galvanized Shelves** – Designed with 2" dividers for more small item storage. Full access between all vertical compartments for longer tool storage.

[illegible] | [illegible] Coating (Yeast) | [illegible] | Alumina-Fill™ | [illegible] | Removable Stainless Steel Tailgate Knee

The C2-60 & C2-60S Options Packages

This Classic II can equipped with the [illegible] most popular and most exclusive options

Latch-Matic™
C2-60
Remote locking system [illegible] audible confirmation and [illegible] also activates lighting
C2-60S
As above, but includes [illegible] Smart Shield [illegible]

Aluminum Treadplate
Protective guards on front of body panels and on top of tailgate

LED Lighting
[illegible]



Extend-A-Shelf™
[illegible]

Bumpers

[illegible]

Independently Mounted Single and Dual Wheel [illegible]essed and Non-Recessed Pouched Slip Resistant Surface



[illegible]

[illegible]

[illegible]

[illegible] Recessed Bumper [illegible] LED Lights

Other Bumper Options



Pouched Bumper



[illegible] Plate Step Bumper



[illegible] Plate Step Bumper with Recess



Pouched Bumper with Recess

[illegible] Equipment Racks

DIMENSIONAL DATA: STANDARD BODIES – SINGLE WHEEL

Model	Approx. Wt.		Cab-to-Axle	A	B	C	D	Approx. Compartment Clear Door Openings				
	Steel	Alum.						E	F	G	H	I
*78-SWs	858 lbs.	472 lbs.	40"	16"	42		78	[illegible]	40-1/2"x14"	12-1/2"x35-1/4"	56-1/2"x14"	12-1/2"x18-1/8"
*98-SWs	1026 lbs.	563 lbs.	56"	28"	48		98	[illegible]	46-1/2"x14"	16-1/2"x35-1/4"	66-1/2"x14"	16-1/2"x18-1/8"
*108-SWs	1026 lbs.	563 lbs.	56	28	48		98	[illegible]	46-1/2"x14"	16-1/2"x35-1/4"	66-1/2 x14"	16-1/2 x18-1/8
*0108-SWs	1045 lbs.	575 lbs.	60"	34-3/4"	47	[illegible]	108	[illegible]	45-1/2"x14"	20-3/4"x35-1/4"	69-3/4"x14"	20-3/4"x18-1/8"
LOW PROFILE BODIES												
*LP-78SWs	818 lbs	450 lbs	40"	18"	42		78	[illegible]	40-1/2x9"	12-1/2"x30-1/4"	56-1/2"x9"	12-1/2"x18-1/8"
LP98-SWs	976 lbs	537 lbs	56"	28	48		98	[illegible]	46-1/2"x9"	16-1/2"x30-1/4"	66-1/2"x9"	16-1/2"x18-1/8
*LP98-SWs	976 lbs	537 lbs	56	28	48		98	[illegible]	46-1/2"x9"	16-1/2"x30-1/4"	66-1/2" x9"	16-1/2 x18-1/8
*LP-108-SWs	990 lbs	545 lbs	60	[illegible]	[illegible]		108	[illegible]	45-1/2 x9	20-3/4"x30-1/4	69-3/4 x9"	20-3/4 x18-1/8

Installers Notes:

STANDARD MODELS

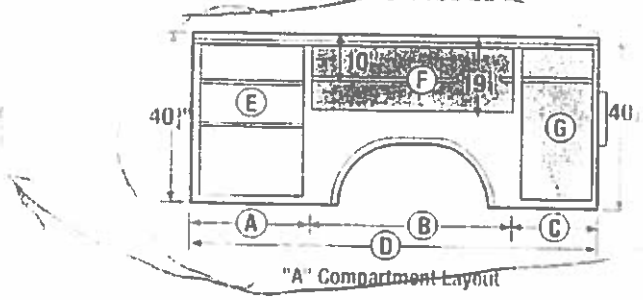

"A" Compartment Layout

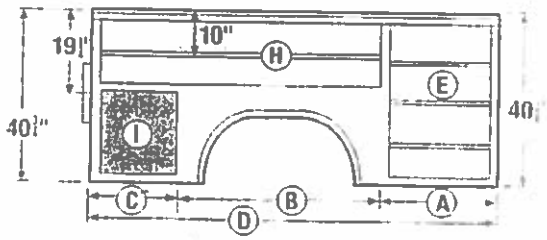

"B" Compartment Layout

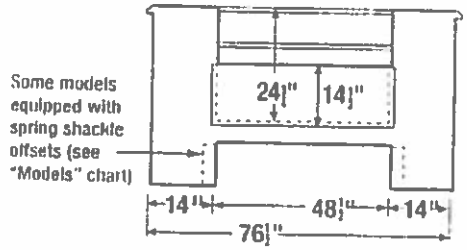

Rear View

LOW PROFILE MODELS

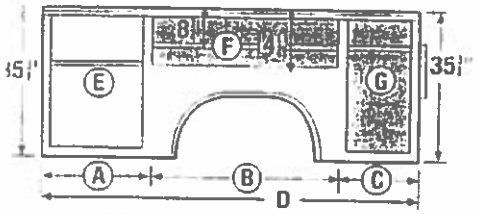

"A" Compartment Layout

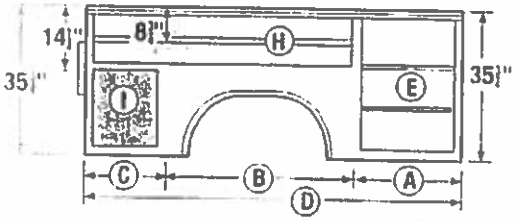

"B" Compartment Layout

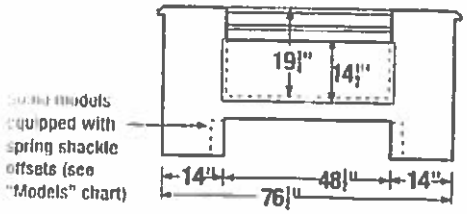

Rear View

AVAILABLE OPTIONS

Powder Coating

- Polyester powder is sprayed on the body then baked to form a highly durable finish
- Resistant to corrosion, chemicals, humidity, scratches, chips and [illegible]
- Brighter finish
- Tolerant of UV exposure



Aluma-Chock®

- [illegible]

- [illegible]
- [illegible]
- [illegible]
- [illegible]

Compartment Lighting System

- Works in conjunction with [illegible] compartment doors are [illegible]
- [illegible]
- [illegible]
- [illegible]



Spray On Bedliner

- Available as a factory [illegible]
- Offers watertight and [illegible]
- Prohibits rust, corrosion and surface [illegible] providing a slip resistant surface

LED Lighting

- Bright, long lasting LED lights

Master Locking

- Steel slide bar simultaneously locks all of the side compartment doors
- [illegible]